

03-31-00

03/30/00

JCS15 U.S. PRO

Please type a plus sign (+) inside this box → ☒

Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 1787-06001

First Inventor or Application Identifier Yang Xu & Teresa Lechner-Fis

Title IMPROVED STREAM SWITCHING SYSTEM

Express Mail Label No. EL444159675 US

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ \* Fee Transmittal Form (e.g., PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 25]  
(preferred arrangement set forth below)
  - Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings (if filed)
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 15]
4. Oath or Declaration [Total Pages 3]
  - a. ☒ Newly executed (original or copy)
  - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))  
(for continuation/divisional with Box 16 completed)
    - i. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

\* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
  - a. ☐ Computer Readable Copy
  - b. ☐ Paper Copy (identical to computer copy)
  - c. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 [Copies of IDS Citations]
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other: \_\_\_\_\_

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

## 17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 23505  
(Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Robert Gray			
	Conley, Rose & Tayon, P.C.			
Address	PO Box 3267			
City	Houston	State	TX	Zip Code 77253-3267
Country	USA	Telephone	713-238-8000	Fax 713-238-8008

Name (Print/Type)	Robert Gray	Registration No. (Attorney/Agent)	41,798
Signature	<i>Robert Gray</i>	Date	March 30, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE  
APPLICATION FOR UNITED STATES LETTERS PATENT

for

**IMPROVED STREAM SWITCHING SYSTEM**

by

Yang Xu and Teresa Lechner-Fish

## IMPROVED STREAM SWITCHING SYSTEM

### CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims priority to provisional application 60/141,357 filed June 28, 1999.

### STATEMENT REGARDING FEDERALLY SPONSORED RESEARCH OR DEVELOPMENT

Not Applicable.

### BACKGROUND OF THE INVENTION

It is often very important to know what fluids are flowing through a conduit such as a pipeline. For example, a buyer and seller may agree upon a price for the fluid flowing through a process pipeline based upon the content of the fluid stream. Thus, the fluid content must be measured. Where multiple pipelines are positioned near one another, it may be economical to use a single meter or measurement device to monitor all of the fluid flows. The device used to extract and deliver the fluid to the measurement device is traditionally referred to as a sampling system.

Figure 1 includes a stream sampling system ("sampling system") 100. Although only a single pipeline is shown, it is to be understood that multiple pipelines may be present. Sampling system 100 includes a sample point attached to pipeline 110, an analyzer 130, and tubing 120 from the sample point to the analyzer 130. Analyzer 130 may include a stream switching system 140 and gas chromatograph 150. In operation, fluid flow through a process pipeline 110. The sample point (preferably a probe fluid) obtains a sample of fluid and delivers it to analyzer 130 via tubing 120. Analyzer 130 measures the content of the fluid sample and either returns the sample to the pipeline or vents the sample to the ambient environment.

1 One problem with such a layout is the large distance from the analyzer 130 to the pipeline  
2 110, which creates a large "dead volume" of fluid. Increased dead volume results in undue mixing  
3 of consecutive fluid samples. This mixing of fluid samples results in "carry-over" between samples  
4 for gas chromatograph analysis. Carry-over is undesirable because accurate analysis requires that  
5 the analysis is representative of the fluid in the process pipeline. Since the volume of transport  
6 tubing and stream sampling components must be flushed a minimum of ten times to insure a  
7 representative sample, the "dead volume" results in significant lag time between sample analysis.  
8 Therefore, upon a sampling of fluid from the pipeline 110, the "dead volume" of fluid must be  
9 vented or otherwise disposed of before the new sample can be measured at the analyzer 130.  
10 Further, although the magnitude of the "dead volume" could be reduced by placing the analyzer 130  
11 closer to the sample point 110, regulations and safety concerns mandate a minimum 50 feet distance  
12 between them. If placed closer than 50 feet from the pipeline 110, the analyzer 130 must be  
13 contained in an expensive explosion-proof housing.

14 Figure 2 includes a stream switching system 140 attached to an analyzer oven 250 that is  
15 part of gas chromatograph 150. Three pipes or tubes 210, 220, 230 attach to switching system 140,  
16 and correspond to first, second and third flow paths. The first pipe or tube 210 connects to a first  
17 sample point 212 and carries a first gas stream of unknown composition from, for example, a  
18 process pipeline. Included along "stream 1" are pressure regulator 214 and pressure gage 215, shut-  
19 off valve 216, particulate filter 217, and a first stream switching valve 218. Second pipe or tube 220  
20 connects to a second sample point 222 and carries second gas stream of unknown composition.  
21 Included along "stream 2" are pressure regulator 224 and pressure gage 225, shut-off valve 226,  
22 particulate filter 227, and a second stream switching valve 228. The third pipe or tube 230 connects  
23 to a third sample point 232 and a calibration sample of known composition. Included along the

1 third path are pressure regulator 234 and pressure gage 235, shut-off valve 236, particulate filter  
2 237, and a third switching valve 238. Third switching valve 238 connects not only to filter 237,  
3 through one port, but also to first and second switching valves 218, 228 through another. Yet  
4 another port of third switching valve 238 attaches to regulator 240 and flow meter 245. Flow meter  
5 245 attaches through a relatively long tube to sample shut-off valve 255 housed in analyzer oven  
6 250. Sample valve 255 connects to a sample valve in the oven, and then connects to the vent 260.  
7 As can be appreciated, although only two streams of unknown fluids are shown, additional streams  
8 could be added by the use of a greater number of flow paths.

9 During operation, a gas chromatograph housed in analyzer oven 250 is calibrated using the  
10 calibration sample from sample point 232. The pressure and flow rate of this stream are maintained  
11 by pressure regulator 234, regulator 240 and flow meter 245. Because the composition of the  
12 calibration sample is known, it may be used to calibrate the gas chromatograph. The calibration  
13 sample flows through third switching valve 238, through the gas chromatograph 150 and out sample  
14 vent 260. If a measurement of the fluid at sample point 222 is desired, the gas along the second pipe  
15 is allowed to flow by actuation of second stream switching valve 228, through first stream switching  
16 valve 218, and through third stream switching valve 238. The third switching valve 238 is the only  
17 valve in the stream switching system that on its own can prevent or block the flow of fluid from all  
18 the sample points. Thus, this configuration is referred to as a "single block" stream switching  
19 system. One drawback of this design is that the fluid from sample point 222 flows through all of the  
20 first, second, and third switching valves prior to arrival at the gas chromatograph, and malfunction  
21 of only a single one of these switching valves prevents the measurement of a sample of fluid from  
22 stream 2.

1 If, after the above-described measurement of stream 2, it is desired to measure the fluid from  
2 stream 1, the system must be purged of the previous fluid sample. Purging of the old fluid stream  
3 from the system prevents contamination between the streams. Thus, the stream switching system of  
4 Figure 2 would switch from stream 2 to stream 1. At that time, adequate accuracy by the gas  
5 chromatograph has likely been assured if all the other necessary criteria have been met. Many refer  
6 to a configuration having a single sample vent as a "single bleed" stream switching system.

7 Thus, a "dead volume" of fluid in a stream switching system is a significant problem.  
8 Another problem encountered in a stream switching system is the reliability and maintenance of the  
9 system. Because an operator may visit a particular stream switching system only infrequently, the  
10 system should be accurate, reliable, as immune to breakdown as possible, and simple to repair when  
11 problems do occur. This highly sought after combination of features is not available with current  
12 stream switching systems.

13 Another drawback in many prior systems is their difficulty in analyzing a complex fluids  
14 because of limitations in the associated gas chromatographs. It would be desirable if a stream  
15 switching system could be developed that could quickly transfer fluid sample to the analyzer. This  
16 drawback also reduces the usefulness of a stream sampling system.

17 A stream sampling system is needed that is faster, more reliable, more flexible, and more  
18 accurate than previous stream sampling systems. Ideally, such a stream sampling system could  
19 reduce the adverse effects of "dead volume." This ideal stream sampling system would also be less  
20 prone to breakdown than previous models, while providing much faster and more accurate  
21 measurements.  
22

## SUMMARY OF THE INVENTION

The invention features a stream switching system including a housing having a common stream path with multiple input ports and at least one output port, tubing connected to the output port, the tubing including a heating coil to heat and control the flow rate of a fluid sample traveling through the heating coil. An insulated housing encapsulating the stream switching housing may be included to stabilize the temperature of the stream switching housing. A silicone rubber heater may also be attached to the stream handling housing. Numerous solenoids or other fluid flow activation switches also connect to the stream switching housing and preferably are positioned outside of the insulated housing.

Another inventive feature of the stream switching system is the use of fluid flow switches (such as solenoids attached to a pressurized line) that prevent the flow of gas while an outside impulse is being applied. This prevents stream switching system leakage during, for example, power failure. The invention also includes a stream switching system having a sample point, a stream switching portion, tubing connecting the two, and one or more membrane or cartridge filters located proximate (preferably within 10 feet and even more preferably within 3 feet) the sample point.

Thus, the invention comprises a combination of features and advantages which enable it to overcome various problems of prior devices. The various characteristics described above, as well as other features, will be readily apparent to those skilled in the art upon reading the following detailed description of the preferred embodiments of the invention, and by referring to the accompanying drawings.

## BRIEF DESCRIPTION OF THE DRAWINGS

For a more detailed description of the preferred embodiment of the present invention, reference will now be made to the accompanying drawings, wherein:

Figure 1 is a prior art sample handling system.

Figure 2 is a prior art stream switching system.

Figure 3 is a schematic of a stream switching system according to an embodiment of the present invention.

Figure 4 is an exploded side view of the embodiment of Figure 3.

Figure 5 is a magnified view of Figure 4.

Figure 6 is an improved sample handling system according to an embodiment of the invention.

Figure 7 is an improved stream switching system according to another embodiment of the invention.

Figure 8 is a preferred embodiment of the stream switching system of Figure 7.

Figure 9 is a preferred Division 1 implementation of the stream switching system of Figure

8.

Figure 10A is a top view of a Division 1 solenoid manifold.

Figure 10B is a side view of a Division 1 solenoid manifold.

Figure 11A is a top view of a Division 1 manifold.

Figure 11B is a side view of a Division 1 manifold.

Figure 12 is a preferred Division 2 implementation of the stream handling system of Figure

8.

Figure 13 is a top view of a Division 2 manifold.



1 Figure 14 is a top view of a Division 2 bottom insulator.

2 Figure 15A is a top view of a Division 2 solenoid manifold.

3 Figure 15B is a side view of a Division 2 solenoid manifold.

4 Figure 16 is a prior art sample handling system.

## 6 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

7 Figure 3 shows a "double block and double bleed" of one preferred embodiment of a stream  
8 switching system according to the invention. The stream switching system 300 includes four  
9 streams upstream of a stream handling portion 391. Four streams include a calibration sample 301,  
10 stream 1 302 corresponding to a first fluid sample, stream 2 303 corresponding to a second fluid  
11 sample, and stream 3 304 corresponding to a third fluid sample. It is to be understood that more or  
12 fewer ports can be included and that one or more separate stream switch systems could be included.

13 Streams 301-304 supply various fluid samples to the sample wetted portion, and connect  
14 respectively to actuatable calibration port 311 and actuatable stream ports 312-314. Actuatable  
15 ports 315-316 and 332-333, as well as ports 331 and 334, are also part of the sample wetted portion  
16 391. Each actuatable port may be actuated into either an open or closed state as controlled by eight  
17 connected solenoids 350-357 (also labeled SV1-SV8) which correspond respectively to ports 311-  
18 316, 332-333. When a port is in an open state, fluid may pass freely through the port. When a port  
19 is in a closed state, fluid is prevented from flowing through that port. Also shown in Figure 3 are  
20 solenoid pressure line 358 and solenoid vent line 359, as well as gas path 342 extending from port  
21 315 to ports 333 and 332.

22 As explained further below, each actuatable stream port 312-314, as well as actuatable  
23 calibration port 311, is positioned in an area 320 that creates a common sample path. Also

1 positioned in the common sample path 320 are an actuatable "blocking" port 315 and an actuatable  
2 "bleed" port 316. In addition, area 321 creates a first sample shut off that contains two "blocking"  
3 ports 332 and port 331. Area 322 creates a second sample shut off that contains two "blocking"  
4 ports 333 and port 334. As shown, ports 332 and 333 are actuatable, while ports 331 and 334 are  
5 not. It is to be understood, however, that all of these ports could be actuatable, or that ports 332 and  
6 333 could be actuatable while ports 331 and 334 are not.

7 Two channels, channel 1 340 and channel 2 345, are output tubing that direct fluid sample  
8 away from the stream switching system. As used with reference to the invention, the term tubing is  
9 used in a general manner and includes other fluid transportation mediums such as piping. The  
10 channels connect to, for example, downstream gas chromatographs including valve, heating, and  
11 measurement devices. Each channel thus may be separately analyzed by a gas chromatograph.  
12 Each channel can also be used as a flow path to "bleed" the system when switching from sample  
13 point to sample point.

14 As can also be appreciated, first and second sample shut offs correspond to first and second  
15 channels 340, 345. Consequently each channel is associated with two solenoids 350 and 357, either  
16 one of which can be actuated to prevent the flow of any fluid through the channel. It can be  
17 appreciated that the use of a solenoid to prevent the flow of fluid is not absolutely necessary, and  
18 any suitable mechanical or electrical gas flow actuation switch may be used. In the illustrated  
19 embodiment, the flow of fluid through channel 1 may be prevented by closing either actuatable  
20 blocking port 315 or actuatable port 332 in the first sample shut off. Similarly, the flow of fluid  
21 through channel 2 may be prevented by closing either actuatable blocking port 315 or the actuatable  
22 port 333 in the second sample shut off. Thus, because the flow of fluid may be prevented through a  
23 channel at either of two locations, this is a "double block" design. In addition, the system may be

1 bled through sample bleed port 316. Thus, because the system may be bled either through a channel  
2 or through the sample bleed port 316 the embodiment is a "double bleed" design.

3 Referring now to Figure 4, a side exploded view of the stream switching portion 391 is  
4 shown. In this embodiment, the stream switching portion constitutes upper, middle, and lower  
5 plates aligned and connected together by dowel pins 470 and torque screws 471-475. The lower  
6 plate, referred to as a manifold plate 410, includes eight actuation ports 411-418 connected by  
7 tubing to solenoids 350-357 (not explicitly shown in Figure 4). The middle plate, also called a  
8 piston plate 420, includes eight locations 421-428 designed to receive respective pistons 450-457.  
9 Middle plate 420 also includes shallow channels, chambers, or grooves that form areas 320-322, as  
10 described with reference to Figure 3. The upper plate, referred to as the primary plate 430, includes  
11 screw holes corresponding to the torque screws, as well as three exemplary fluid ports 316, 332, and  
12 331. Eight pistons 450-457 (corresponding to ports 311-316, 332-333) as well as a pair of actuating  
13 diaphragms 440 lie between manifold plate 410 and middle plate 420. Sealing diaphragm 465 and  
14 cushion diaphragm 460 lie between the primary plate 430 and middle plate 420. These diaphragms  
15 ensure a leak-free fit between each pair of plates and between a piston and its corresponding port.  
16 The actuating diaphragms may be made from Kapton of about 3 mm thickness. Similarly, the  
17 sealing diaphragms may be made from Teflon coated Kapton. However, as would be appreciated  
18 by those of ordinary skill, the invention is not limited solely to these sealing diaphragms.

19 Figure 5 includes a close-up view of piston 454, manifold plate 410 with attached solenoid  
20 or other appropriate fluid flow activation switch, middle plate 420, primary plate 430 including  
21 passage 530 (corresponding to one of the ports illustrated in Figures 3 and 4), and diaphragms 440,  
22 460, and 465. The left portion of Figure 5 includes a fluid stream 510 such as a calibration gas or  
23 fluid sample. The right portion of Figure 5 includes actuation gas 520. When a port is open (as

1 shown on the left side of Figure 5), a fluid stream 510 between primary plate 430 and diaphragm  
2 465 exits through passage 530. Conversely, when a port is closed (as shown on the right), there is  
3 no flow of a fluid stream 510. Instead, an actuation gas 520 is applied by the solenoid 525 against  
4 the piston head of piston 454. The piston 454 is forced upward, with its narrow end abutting the  
5 lower end of passage 530 formed in primary plate 430. Because the relatively large surface area of  
6 its head is presented to the actuating fluid 520, the piston 454 inherently multiplies the force  
7 available such that a gas tight seal is formed against the passage 530. As can be appreciated, a  
8 piston is not the only possible actuation member, with suitable devices including solenoids, flapper  
9 valves, direct diaphragm valves, and others.

10 Referring to Figures 3, a sample from stream 1 302 will be used to illustrate the operation of  
11 the device. The pressure in each stream from a pipeline is normally reduced to about 15-25 psi.  
12 Consequently, a sample from, for example, a process pipeline travels to channel 320 via port 312  
13 when port 312 is open. Port 312 being open corresponds to piston 454 being in a lower position.  
14 As can be understood from Figure 4 and as is shown in Figure 5, the piston 454 is forced to this  
15 lower position from the fluid pressure applied through stream 1 302 and a lack of actuation pressure  
16 applied by solenoid 354. Gravity may also assist in the piston falling to a lower position. To avoid  
17 cross-contamination, when port 312 is open, ports 311, 313, and 314 are, therefore, closed in normal  
18 operation. This closure of ports 311, 313, and 314 corresponds to pistons 455, 453 and 452 being in  
19 an elevated position by activation fluid pressure applied through solenoids 355, 353 and 352. As  
20 can consequently be appreciated, the assembly shown in Figure 4 need not be vertical, but instead  
21 can operate from a variety of angles, and the use of terms such as "lower" and "upper" is merely for  
22 explanatory purposes.

1 The fluid sample travels through port 312 and along common stream channel 320 to  
2 blocking port 315, which is also open by operation of the associated solenoid. The sample then  
3 travels through blocking port 315 and along gas path 342 that includes a "T" at point 343. This "T"  
4 intersection at point 343 splits the sample into two portions. A first portion travels to sample shut  
5 off channel 321 via actuatable port 332. When port 332 is open, the sample travels along the  
6 sample shut off channel to port 331, which then allows this first portion of the sample to flow out  
7 channel 1 340 to a first gas chromatograph (not shown). A second portion of the sample travels to  
8 sample shut off channel 322 via an open actuatable port 333. Port 334 allows this second portion of  
9 the sample to flow out channel 2 345 to a second gas chromatograph (not shown). As would be  
10 appreciated by one of ordinary skill in the art, gas path 342 may be external tubing or may be milled  
11 into one or more plates, such as lines permanently drilled into primary plate 430.

12 The double block and double bleed design of this embodiment has particular advantages.  
13 For example, when switching from stream 1 to stream 2, the system must be bled. First, the sample  
14 shut offs are closed to block the flow stream by the closure of sample shut off ports 332 and 333 by  
15 actuation of solenoids 350 and 357. Stream port 312 is also closed to block the flow of pressurized  
16 gas from stream 1. A short time thereafter, sample bleed port 316 in the common stream path is  
17 opened while port 315 is still open, allowing the pressurized gas in common stream path 320 to  
18 equalize to atmospheric pressure. Simultaneously, inside the associated gas chromatograph 150, the  
19 carrier gas associated with the well-known operation of the chromatographic valve sampling injects  
20 an aliquot of sample fluid for analysis by the gas chromatograph. When this occurs, the remaining  
21 fluid in the system downstream of the sample shut offs is allowed to equalize to atmospheric  
22 pressure. At that time, the sample shut offs can be opened, the sample bleed port 316 closed, and  
23 the system purged with the new stream from stream 2. Because the pressure of the stream switching

1 system has already been lowered to atmospheric pressure, and because stream 2 is under pressure,  
2 the sample from stream 2 will quickly flow through the stream switching system. This results in a  
3 faster purging with lower volumes of the new sample being necessary.

4 As an additional benefit to this embodiment, the use of two channels allow near-parallel  
5 analysis by separate gas chromatographs or detectors within the same gas chromatograph, which  
6 can speed the sample analysis of a complex sample having numerous components. For example, an  
7 open first sample shut off and closed second sample shut off allows sample to flow through channel  
8 1 for a period of five seconds. An open second sample shut off and closed first shut off could then  
9 allow sample to flow through channel 2 for the next five seconds. This results in near-simultaneous  
10 analysis by the gas chromatographs or detectors.

11 Moreover, this design is particularly desirable because the advantages recited above are  
12 achieved without the expense otherwise necessary (such as for extra valves, etc) to attain a double  
13 block and double bleed configuration. Further, the above design can be easily modified for  
14 particular situations. For example, additional ports can be freed for use as stream ports if only  
15 single blocking or only a single channel is desired. The design can also be modified to be a single  
16 bleed design, if desired. The design may also be modified to add or subtract parts as necessary.

17 Improvements to this design are also possible. For example, it is known to modify the  
18 design of Figure 2 to include membrane filters that by-pass liquid condensate as shown in Figure 16.  
19 Membrane filters prevent condensate in the pipeline from flowing into the stream switching system,  
20 which can contaminate the gas chromatograph.

21 Figure 16 includes a stream switching system attached to an analyzer oven 1650 that is part  
22 of gas chromatograph 150. Three input pipes or tubes 1610, 1620, 1630 attach to switching system  
23 140, and correspond to first, second and third flow paths. The first pipe or tube 1610 connects to a

1 first sample point 1612 and carries a first fluid stream of unknown composition from, for example, a  
2 process pipeline. Included along "stream 1" are pressure regulator 1614 and pressure gage 1615,  
3 shut-off valve 1616, particulate filter 1617, and a first stream switching valve 1618. Interposed  
4 between particulate filter 1617 and first stream switching valve 1618 is membrane filter 1670.  
5 Connected to membrane filter 1670 are flow meter 1671, valve 1672, and bypass line 1611 for  
6 alternate expulsion of sample from "stream 1." Second pipe or tube 1620 connects to a second  
7 sample point 1622 and carries second fluid stream of unknown composition. Included along  
8 "stream 2" are pressure regulator 1624 and pressure gage 1625, shut-off valve 1626, particulate  
9 filter 1627, and a second stream switching valve 1628. Interposed between particulate filter 1627  
10 and first stream switching valve 1628 is membrane filter 1680. Connected to membrane filter 1680  
11 are flow meter 1681, valve 1682, and bypass line 1621 for alternate expulsion of sample from  
12 "stream 2." The third pipe or tube 1630 connects to a third sample point 1632 and a calibration gas  
13 stream of known composition. Included along the third path are pressure regulator 1634 and  
14 pressure gage 1635, shut-off valve 1636, particulate filter 1637, and a third switching valve 1638.  
15 Third switching valve 1638 connects not only to filter 1637, through one port, but also to first and  
16 second switching valves 1618, 1628 through another. Yet another port of third switching valve  
17 1638 attaches to regulator 1640 and flow meter 1645. Flow meter 1645 attaches through a  
18 relatively long tube to sample shut-off valve 1655 housed in analyzer oven 1650. Also connected to  
19 sample shut-off valve 1655 is sample vent 1660. As can be appreciated, although only two streams  
20 of unknown gas are shown, additional streams could be added by the use of a greater number of  
21 flow paths. As can be appreciated, the membrane filters of Figure 16 are located close to the stream  
22 switching valves. This location for the membrane filters eliminates liquid condensate from sample  
23 immediately upstream from chromatograph sample valve, if desired.

1 The inventive arrangement of Figure 6 includes a sample point (preferably a probe) 615 that  
2 is located at, for example, process pipeline 610. Attached to sample probe 615 is a sample flow  
3 path that includes tubing or piping 620, a pressure regulator 625, pressure gage 630, regulator 635,  
4 one or more membrane filters 640, heat tracing 645, valve 650, particulate filter 655, sample  
5 switching system 660 including a flow restristor and pre-heat coil 661, and gas chromatograph 665.

6 As can be appreciated, in this embodiment the membrane filter(s) 640 are located not in the  
7 sample switching system 660, but instead are located near the sample point. These filters are  
8 preferably within ten feet, and even more preferably, within three feet of the sample point.  
9 Placement of the membrane filters 640 as close to the sample point 610 as feasible results in a  
10 number of advantages. For example, because every device in the stream has an associated pressure  
11 drop, the closer the filter is to the sample point, the lower the pressure needed in the overall system  
12 to force the sample through the filter. Therefore, the embodiment of Figure 6 has sufficient pressure  
13 to force the sample gas through the membrane filter. In addition, membrane filters require  
14 occasional replacement. Placement of the membrane filter close to the sample point, and the  
15 accompanying lower pressure necessary to operate the system, results in a longer life filter. Further,  
16 if and when the filter's operating life does expire, the location of the filter outside the stream  
17 switching system simplifies replacement and maintenance. This location for the membrane filter  
18 also simplifies the heating of the sample on the sample handling system, if desired. This design  
19 change could also be applied to cartridge filters with a similar result.

20 Other improvements to the system include the manner of maintaining a target temperature  
21 for a stream switching system. Often in previous systems, the stream switching portion of the  
22 system was not heated. Even where this portion was heated, it was difficult to maintain a constant



1 temperature because of the large mass and size of the stream switching portion. In contrast, Figures  
2 7-8 illustrate improvements to the stream switching system of Figures 3 and 4.

3 Figures 7-15B illustrate stream switching portions designed to maintain an elevated  
4 temperature within a narrow range. Stream switching system 700 includes a flow panel portion 790  
5 upstream of sample wetted portion 791. Flow panel portion includes inputs for calibration 701,  
6 stream 1 702, stream 2 703, and stream 3 704. Streams 701-704 include respective valves 705 and  
7 respective particulate filters 706 along each stream's length prior to entry of the sample wetted  
8 portion of the stream switching system.

9 Streams 701-704 supply various fluid samples to the sample wetted portion, and connect  
10 respectively to actuatable calibration port 711 and actuatable stream ports 712-714. Actuatable  
11 ports 715-716 and 732-733, as well as ports 731 and 734, are also part of the sample wetted portion  
12 791. Each actuatable port may be actuated into either an open or closed state as controlled by eight  
13 connected solenoids 750-757 (SV1 - SV8) which correspond respectively to ports 711-716, 732-  
14 733. When a port is in an open state, fluid may pass freely through the port. When a port is in a  
15 closed state, fluid is prevented from flowing through that port. Also shown in Figure 7 are solenoid  
16 pressure line 758 and solenoid vent line 759.

17 As is explained further below, each actuatable stream port 712-714, as well as actuatable  
18 calibration port 711, is positioned in an area 720 that creates a common sample path. Also  
19 positioned in the common sample path 720 are an actuatable "blocking" port 715 and an actuatable  
20 "bleed" port 716. In addition, area 721 creates a first sample shut off that contains tube "blocking"  
21 ports 732 and 731. Area 722 creates a second sample shut off that contains two "blocking" ports  
22 733, and port 734. As shown, ports 732 and 733 are actuatable, while ports 731 and 734 are not. It

1 is to be understood that all of these ports could be actuatable, or ports 731 and 734 could be  
2 actuatable while ports 732 and 733 are not.

3 Two channels, channel 1 740 and channel 2 745, are output tubing that direct fluid sample  
4 away from the stream switching portion. A first flow restrictor and pre-heat coil 760 is in  
5 association with coil 1, and a second flow restrictor and preheat coil 761 is in association with coil  
6 2. More specifically, first pre-heat coil 760 is located between "T" point 743 and the first sample  
7 shut off. Second pre-heat coil 761 is located between "T" point 743 and the second sample shut off.

8 This stream switching system operates in generally the same manner as the stream switching  
9 system of Figure 3. However, as sample flows through the respective flow restrictors and pre-heat  
10 coils 760, 761, the sample is heated. This heating of the sample, if desired, accomplishes two goals.  
11 First, the sample must preferably be introduced to the gas chromatograph as a single phase sample  
12 instead of a two-phase liquid/gas sample. Temperatures above about 80 degrees Fahrenheit are  
13 normally adequate to maintain a gaseous sample of most hydrocarbon process streams at a sample  
14 pressure of 15-25 psi. Second, an elevated temperature (preferably near the chromatograph  
15 temperature) for the sample is desirable for the optimal operation of the gas chromatograph. Thus,  
16 the "pre-heating" of the sample helps to achieve a more accurate measurement of the sample's  
17 composition by the gas chromatograph. Further, the pre-heat coil additionally acts as a restriction  
18 column to flow because of a small inner diameter. By selecting the proper diameter tubing, the  
19 sample flow at the vent is reduced from an unobstructed 200-250 cc/minute at 15 psig inlet pressure  
20 to about 50-70 cc/min at 15 psig. The increased control over sample flow rate given by the pre-heat  
21 coil allows simultaneous analysis by gas chromatographs downstream to each coil.

22 An accompanying inventive feature is an insulative design that stabilizes temperature  
23 variations in the stream switching system. The preferred insulative design changes depend on

1 whether the application is Division 1 or Division 2. A Division 1 application is in an area where the  
2 hazard can exist under normal operating conditions. A Division 2 application is in area where  
3 ignitable gases or vapors are handled, processed, or used, but which are normally closed containers  
4 or closed systems from which they can only escape through accidental rupture or breakdown of  
5 such containers or systems.

6 Figure 8 illustrates a stream switching system appropriate for Division 1 application. A  
7 lower plate, referred to as a manifold plate 810, includes eight actuation ports. The middle plate,  
8 also called a piston plate 820, includes eight locations designed to receive respective pistons 850-  
9 857. Middle plate 820 also includes grooves, shallow channels or chambers that form areas 720-  
10 722, as described with reference to Figure 7. The upper plate, referred to as the primary plate 830,  
11 includes screw holes corresponding to torque screws, as well as fluid ports. Eight pistons 850-857  
12 (corresponding to ports 711-716, 732-733) as well as a pair of actuating diaphragms 840 lie between  
13 manifold plate 810 and middle plate 820. These diaphragms ensure a leak-free fit between each pair  
14 of plates and between a piston and its corresponding port. The actuating diaphragm may be made  
15 from Kapton of about 3 mm thickness. Sealing diaphragm 865 and cushion diaphragm 860 lie  
16 between the primary plate 830 and middle plate 820. The sealing diaphragms may be made from  
17 Teflon-coated Kapton. Supporting plate 880 attaches to and supports insulation plate 870, which in  
18 turn attaches to the bottom of manifold plate 810.

19 Figure 9 includes the stream switching system 791 of Figures 7 and 8 in an insulative  
20 housing. In order to stabilize the temperatures in heated zones, an "oven" is created from a thermal  
21 insulation material. This oven is essentially a sleeve that surrounds the rest of the stream switching  
22 system and keeps its temperature stable, except for the solenoids, which must be kept away from the  
23 heat inside the oven. Insulation wall 910 surrounds stream switching system 791 and connects to

1 both bottom insulation 870 and to insulation cover 920. Attached to and supporting insulation cover  
2 920 is upper supporting plate 930. Supporting plate 930 also attaches to solenoid manifold 940  
3 which, in turn, connects to eight solenoids 950. Piping 960 connects solenoids 950 to manifold  
4 plate 810. To simplify the illustration, only a single piping tube 960 is shown, but it is to be  
5 understood that in the preferred embodiment each solenoid 950 connects via a separate piping to the  
6 manifold plate 810. Also illustrated are tubing 970 attached to the stream switching system 791,  
7 and one or more pre-heat coils 975, as explained with reference to Figure 7. One or more heaters  
8 such as silicon rubber heaters may be located on the side of the stream switching system assembly  
9 to warm and stabilize the temperature of stream switching system 791. Insulative housing is  
10 preferably made from foam material, manufactured by and available from Rogers Inc. The entire  
11 assembly may be aligned by dowel pins and attached together by a plurality of screws that protrude  
12 through the insulative housing. The assembly may then be located in an explosion-resistant  
13 container suitable for the Division 1 environment.

14 Figures 10A and 10B show a Division 1 solenoid manifold 940. Solenoid manifold 940  
15 includes eight regions 1011-1018 corresponding to eight solenoids. Each region 1011-1018  
16 contains five holes corresponding to an input pressure line, a release line, an actuation gas line, and  
17 two mounting holes. As shown in Figure 10B, the Division 1 solenoid manifold includes eight side  
18 portals corresponding to the piping that connects the solenoid manifold 940 and the manifold plate  
19 810. Hoes 1020, 1025 are screw holes.

20 Figures 11A and 11B show a Division 1 manifold plate 810. Manifold plate 810 includes  
21 ten screw holes 1110-1119 suitable for torque screws, and two dowel pin holes 1105, 1106. Gas  
22 pressure from the solenoids travels through eight portals 1111-1118 to actuate the pistons.

1 Figure 12 illustrates a system containing a stream switching system appropriate for Division  
2 2 application. This Division 2 system is typically wall mounted, and is divided into a lower  
3 (sample) enclosure 1290 and an upper (electronics) enclosure 1295. Lower enclosure 1290 includes  
4 a stream switching system 791 proximate to an opening in wall 1225. Stream switching system 791  
5 attaches at its bottom to an insulator 1210. Insulator 1210, preferably made from Teflon, connects  
6 to an outside manifold 1215. On its bottom, outside manifold 1215 contains eight pressure input  
7 locations corresponding to the eight pistons of the stream switching system. The stream switching  
8 system is encased in an insulation cover 1220 that is anchored to wall 1225. Also inside insulation  
9 cover 1220 may be tubing 1270 or one or more heating coils. Upper enclosure 1295 includes a set  
10 of solenoids 1250 attached to a solenoid manifold 1240 and outside solenoid manifold 1230. Piping  
11 1260 connects outside solenoid manifold 1230 to outside manifold 1215. The Teflon insulator 1210  
12 is a trademark of DuPont.

13 Figure 13 shows a Division 2 outside manifold 1215. Eight ports correspond to the eight  
14 pistons of the preferred embodiment. Fourteen torque screw holes 1320-1333 for torque screws are  
15 also shown, in addition to two dowel pin holes 1341, 1342 suitable for dowel pins.

16 Figure 14 shows a bottom insulator 1210 that connects to outside manifold 1215. Bottom  
17 insulator 1210 includes eight through holes 1411-1418 for communicating gas pressure to the  
18 pistons of the stream switching system. Fourteen torque screw holes 1420-1433 receive the same  
19 torque screws as placed through the outside manifold 1215. Six through holes for tubing fitting  
20 connection

21 Figures 15A and 15B show an upper or outer solenoid manifold 1230. Included are eight  
22 regions 1511-1518 corresponding to eight solenoids. Each region 1511-1518 contains five holes

1 corresponding to an input pressure line, a release line, an actuation gas line, and two mounting  
2 holes. Also shown are actuating gas supply line 1519 and vent line 1520.

3 Referring back to Figure 7, another improvement is the use of solenoids 750-757 to increase  
4 safety. If conventional electronically-actuated solenoids are utilized with the stream switching  
5 system of Figure 7, upon a power failure gas sample will flow freely through the sample handling  
6 system, resulting in a risk of explosion and waste of gas. In the preferred embodiment, the solinoids  
7 are also switched electronically. Under normal operating conditions, however, the solenoid used  
8 with the invention is "open." When these solenoids 750-757 are open, actuating gas can flow into  
9 the valve to push the pistons into an upper, elevated position, stopping sample flow. Thus, upon a  
10 power failure or similar mishap, the solinoids 750-757 are open and the stream switching system of  
11 Figure 7 will stop the sample flow. This significantly lessens the chance of explosion. These  
12 solenoids "close" only upon the application of actuation gas from the pressure line, which requires  
13 electrical power.

14 While preferred embodiments of this invention have been shown and described,  
15 modifications thereof can be made by one skilled in the art without departing from the spirit or  
16 teaching of this invention. The embodiments described herein are exemplary only and are not  
17 limiting. Many variations and modifications of the system and apparatus are possible and are within  
18 the scope of the invention. Accordingly, the scope of protection is not limited to the embodiments  
19 described herein, but is only limited by the claims that follow, the scope of which shall include all  
20 equivalents of the subject matter of the claims.

21

## CLAIMS

### WHAT IS CLAIMED IS:

1. A stream switching system, comprising:
  - a stream switching housing having at least one common stream channel portion with a plurality of input ports and at least one output port;
  - tubing connected at least one of said output ports,
  - said tubing at least in part being a pre-heat coil suitable to heat a gas sample traveling through said coil and to act as a flow restrictor.
2. The stream switching system of claim 1, further comprising:
  - an insulated housing forming an interior region and encapsulating said stream switching housing in said interior region, said insulated housing stabilizing a temperature of said stream switching housing.
3. The stream switching system of claim 2, further comprising:
  - a heater within said interior region.
4. The stream switching system of claim 2, further comprising:
  - a plurality of gas flow actuation switches positioned outside of said insulated housing;
  - piping connecting said plurality of fluid flow actuation switches to said insulated housing.

1           5.     The stream switching system of claim 4, wherein said fluid flow actuation switches  
2 are solenoids.

3  
4           6.     The stream switching system of claim 5, wherein said piping connects said solenoid  
5 to said stream switching housing.

6  
7           7.     The stream switching system of claim 3, wherein said fluid flow actuation switches  
8 connect to said insulated housing.

9  
10          8.     The stream switching system of claim 3, wherein said fluid flow actuation switches  
11 are remote from said insulated housing.

12  
13          9.     A stream switching system, comprising:

14               a stream switching housing having a common stream channel portion with a  
15 plurality of actuatable input ports and at least one actuatable output port, each of said ports  
16 being actuatable between an open position permitting the flow of fluid through the port, and  
17 a closed position not permitting the flow of fluid through the port;

18               a plurality of fluid flow actuation switches associated with said actuatable ports, said  
19 fluid flow actuation switches controlling the placement of said actuatable ports between said  
20 open and closed positions, said fluid flow actuation switches requiring an outside impulse to  
21 place said actuatable ports in said open position.



1           10.    The stream switching system of claim 9, wherein each of said fluid flow actuation  
2 switches corresponds to a single actuatable port of said actuatable input ports and said output ports.

3  
4           11.    The stream switching system of claim 9, wherein said fluid flow actuation switches  
5 are solenoids.

6  
7           12.    The stream switching system of claim 9, wherein each of said fluid flow actuation  
8 switches connects to a pressurized line of actuation fluid, said activation fluid of sufficient pressure  
9 to place said ports in said open position.

10  
11           13.    A stream switching system, comprising:  
12                a sample point location;  
13                a stream switching portion;  
14                tubing connecting said sample point location to said stream switching system  
15                portion;  
16                one or more membrane or cartridge filters connected to said tubing and located  
17 proximate the sample point and between said sample point location and said stream  
18 switching portion.

19  
20           14.    The stream switching system of claim 13, wherein said membrane or cartridge filters  
21 are within 10 feet of said sample point.

22

1           15.    The stream switching system of claim 13, wherein said membrane or cartridge filters  
2 are within 3 feet of said sample point.

3

4           16.    The stream system of claim 13, further comprising:  
5                   a pressure regulation device proximate said sample point.

6

7           17.    The stream switching system of claim 16, wherein said pressure regulation device is  
8 upstream said membrane or cartridge filters.

9

10  
11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
21

## ABSTRACT

An improved double block and double bleed stream switching system (modifiable to, for example, a double block, single bleed stream switching system) includes a common stream path for a multitude of gas streams from, for example, a process pipeline. The improved stream switching system includes a heating mechanism and insulation oven to help temperature stabilization, along with a structure to separate temperature sensitive solenoids from the heated area. Pre-heat coils are located between the sample switching system and the sample shut off system to warm the gas sample and to act as a flow restrictor. A first embodiment is suited for the Division 1 environment and a second embodiment is suited for Division 2 uses. The improved stream switching system may also feature membrane or cartridge filters located upstream of the sample wetted portion of the stream switching system.


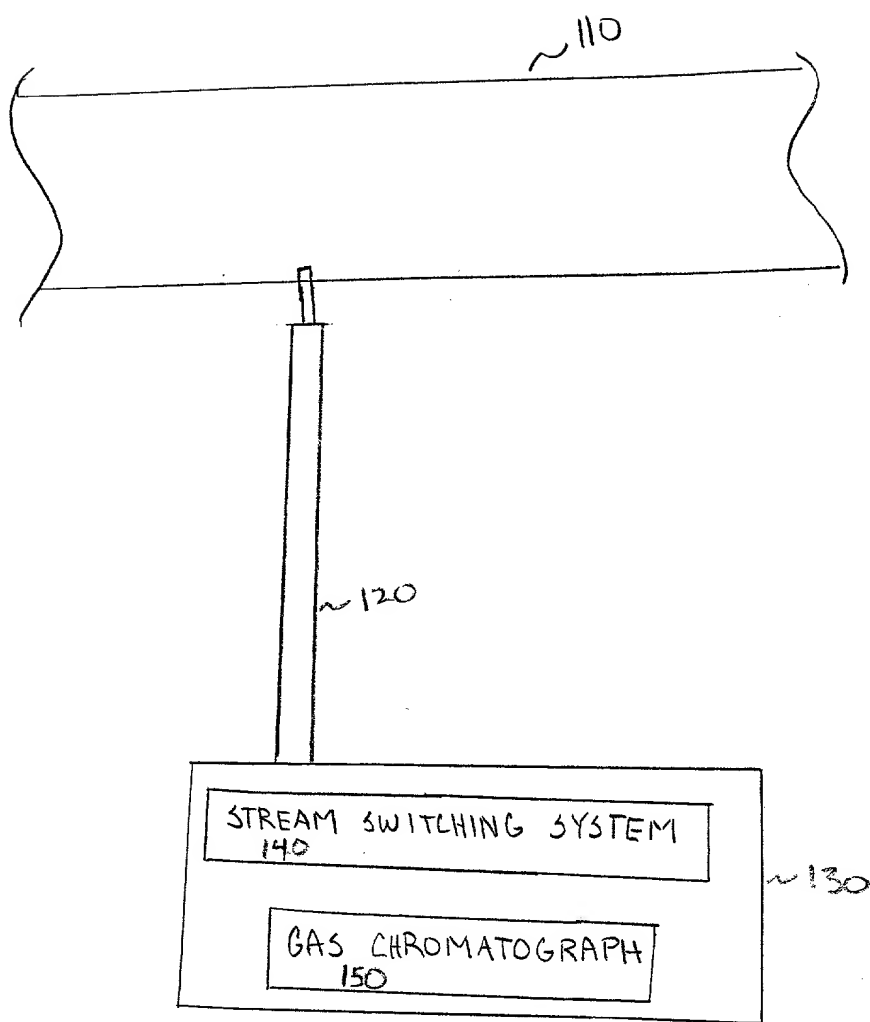


Fig. 1

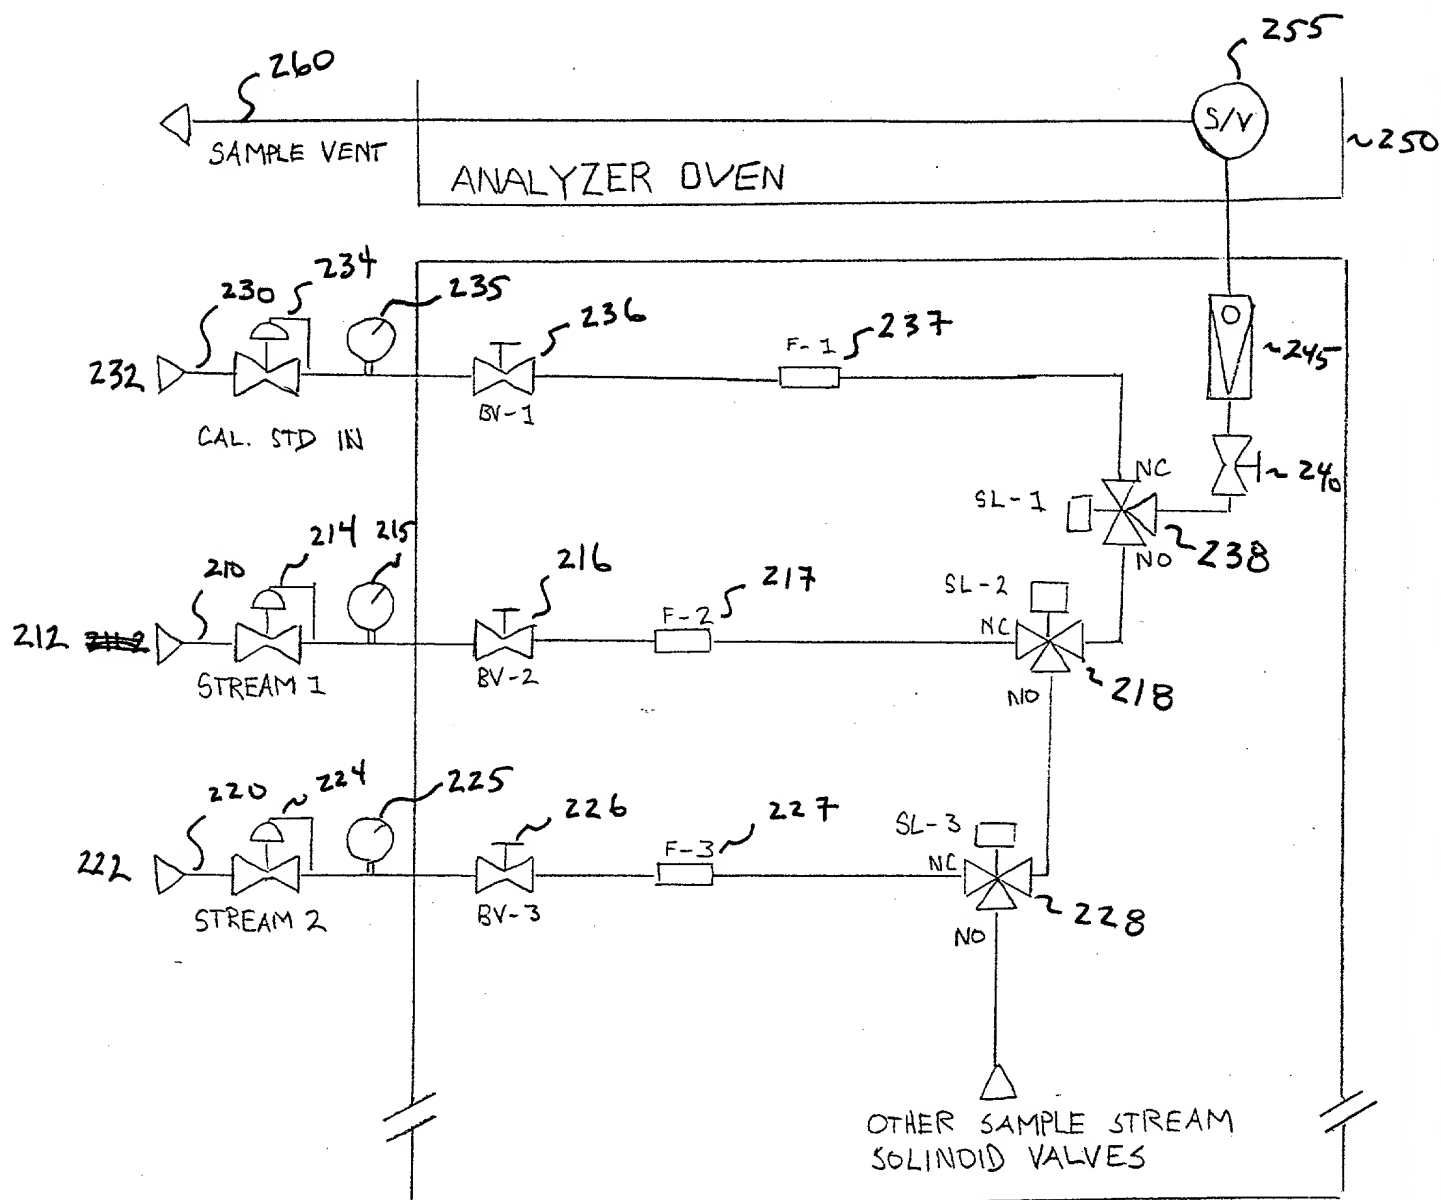

140 ↗

Fig. 2

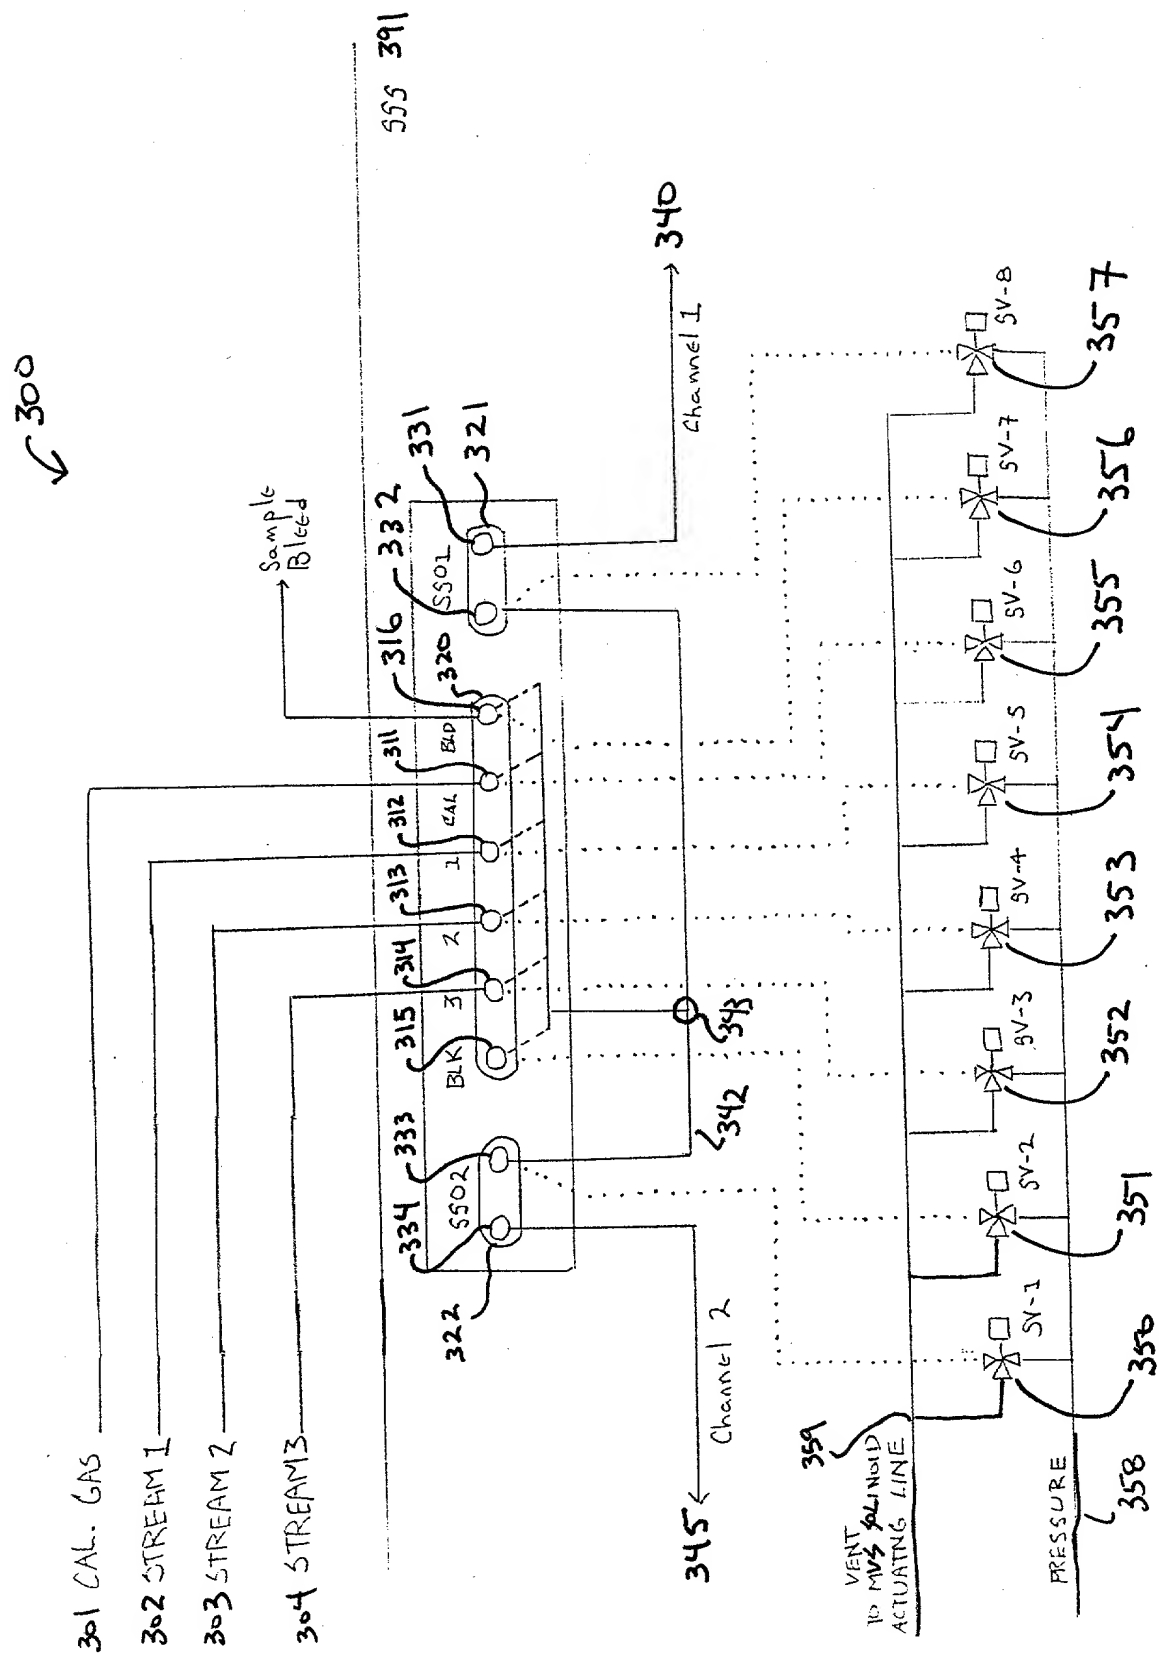
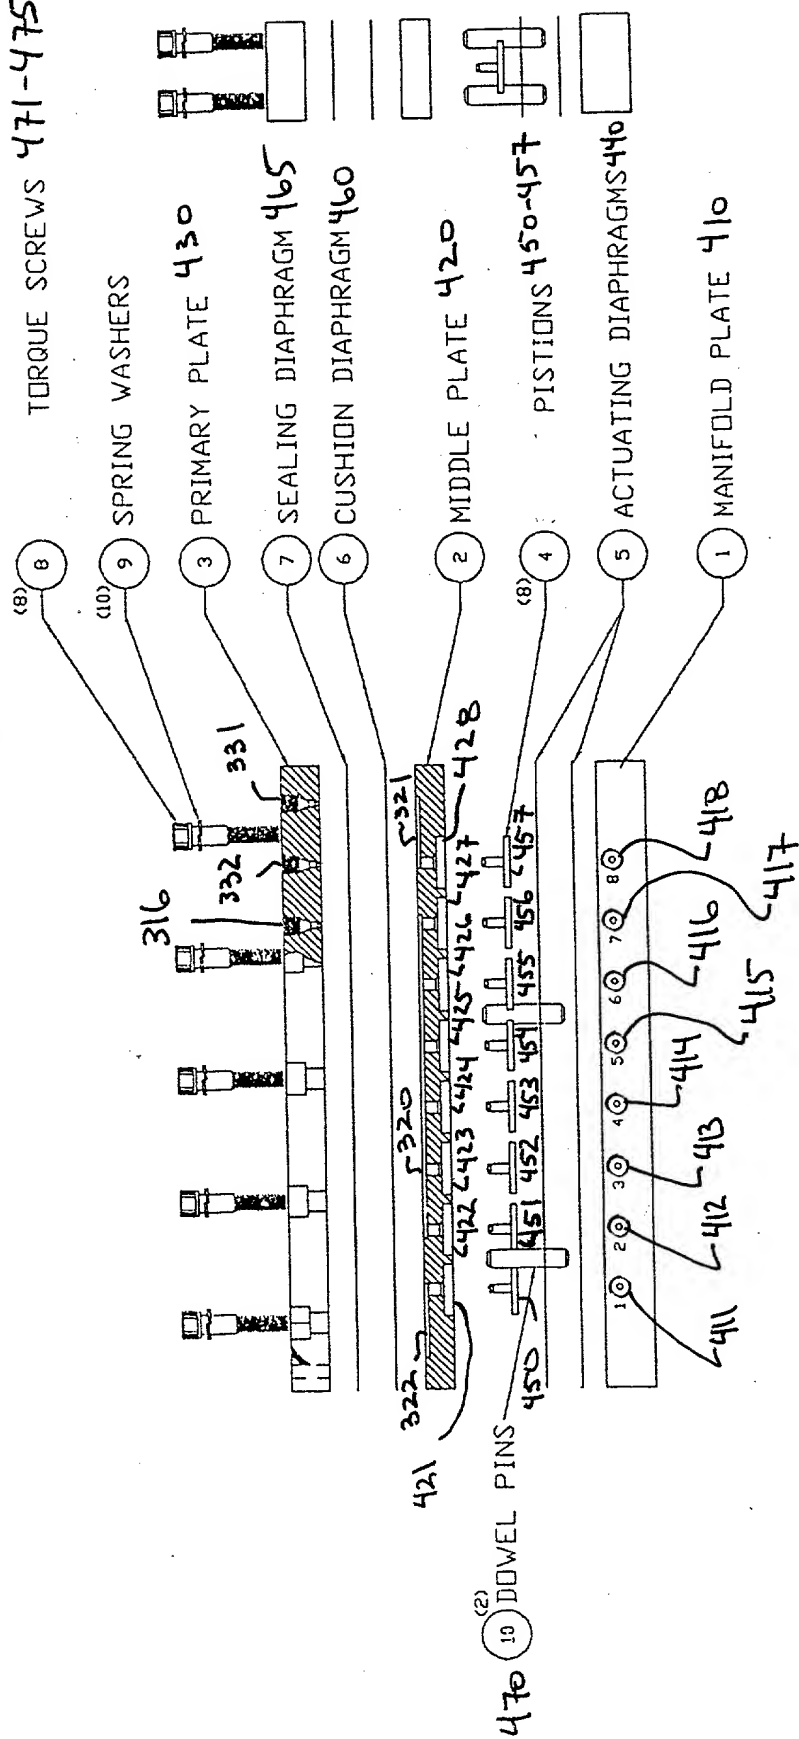


Fig. 3

[illegible]

Fig

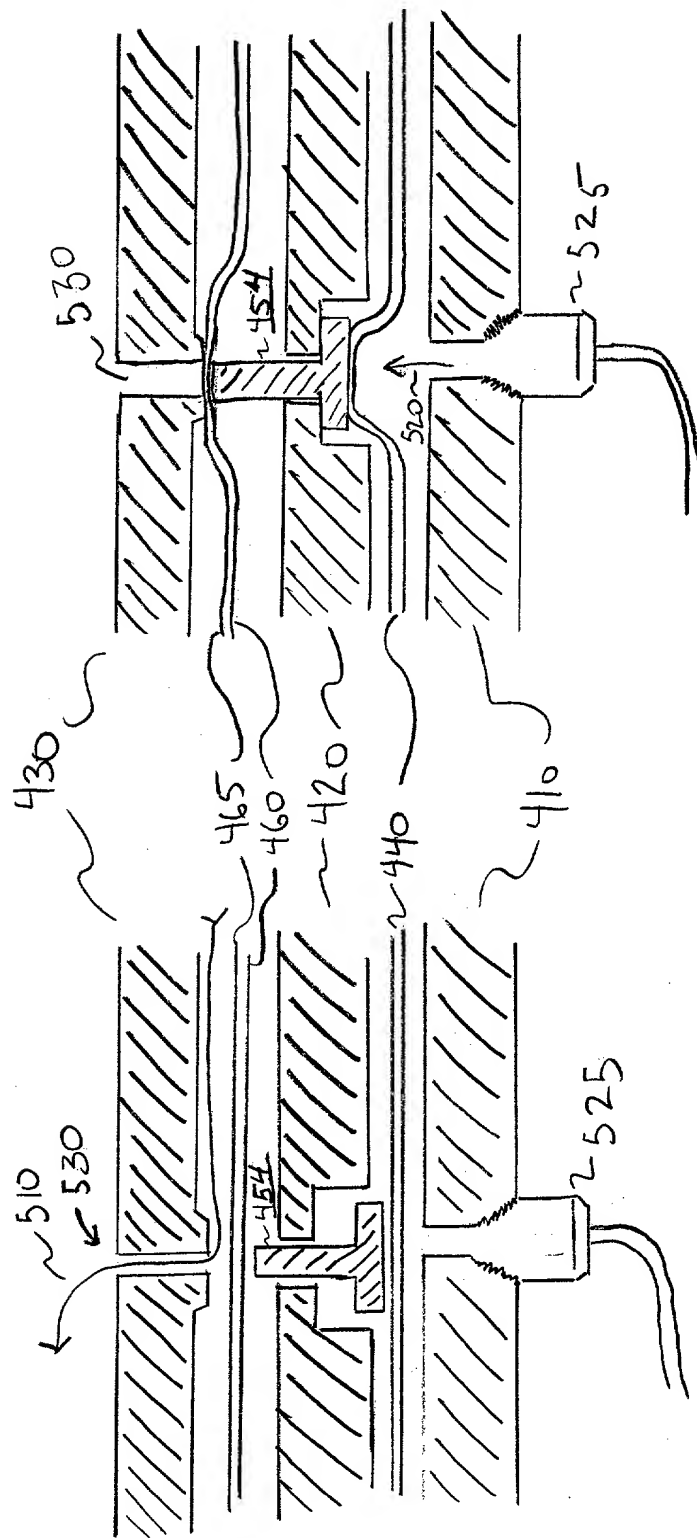


Fig. 5



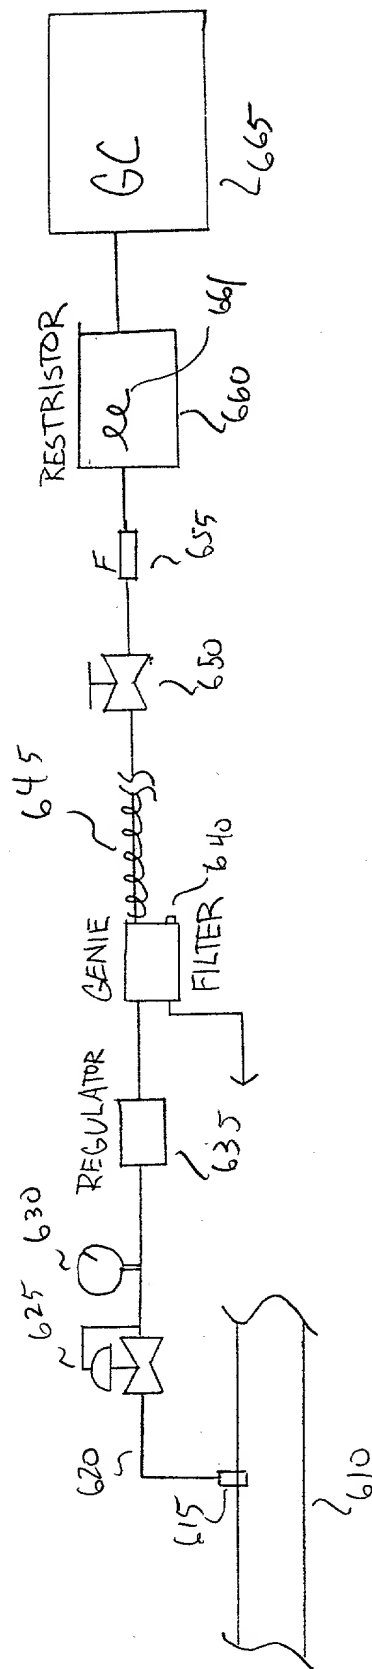


Fig. 6

Fig-7

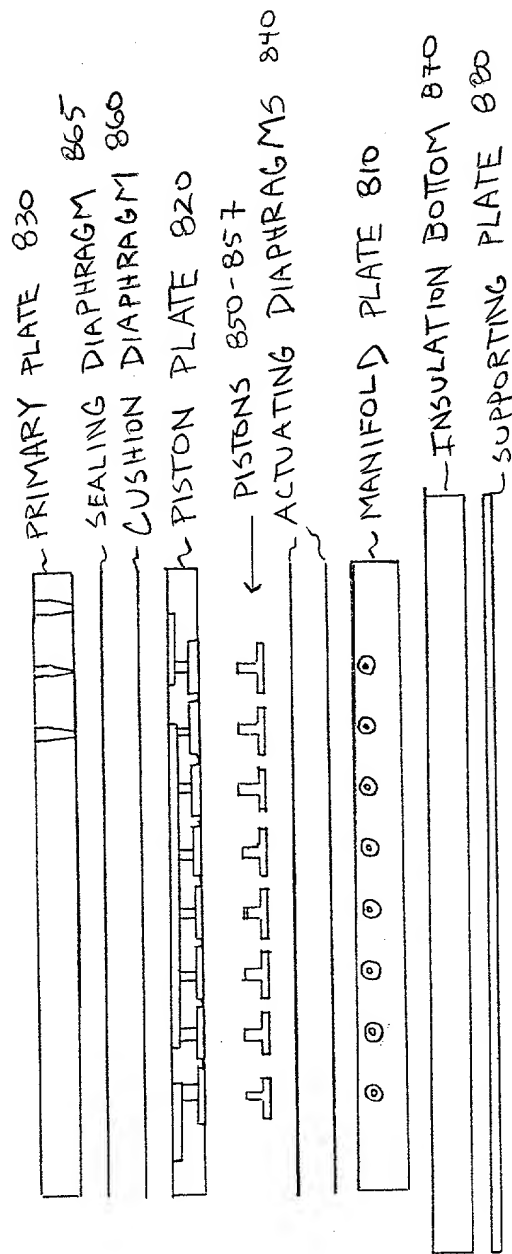


Figure 8

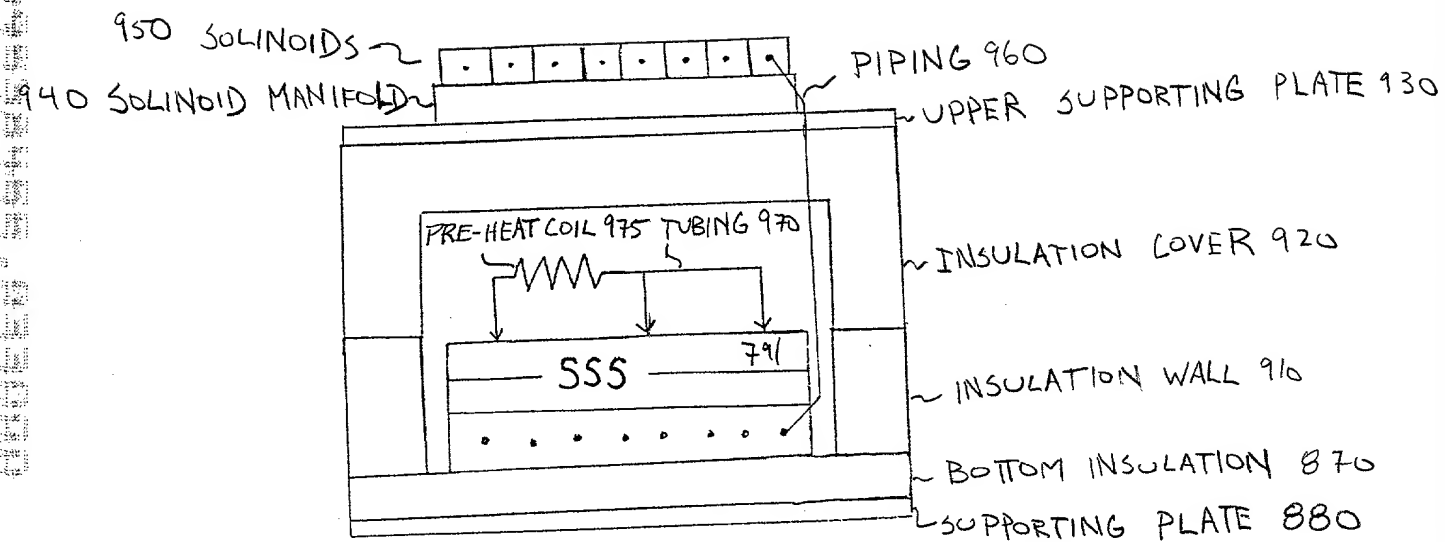


Figure 9

9407

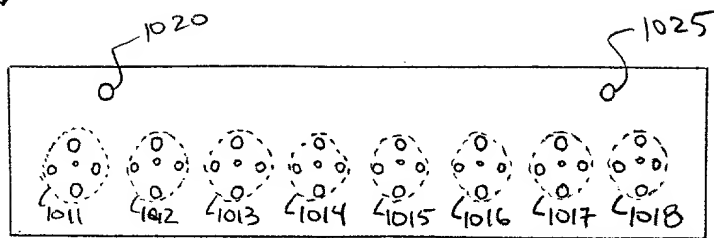


Fig. 10A




Fig. 10B


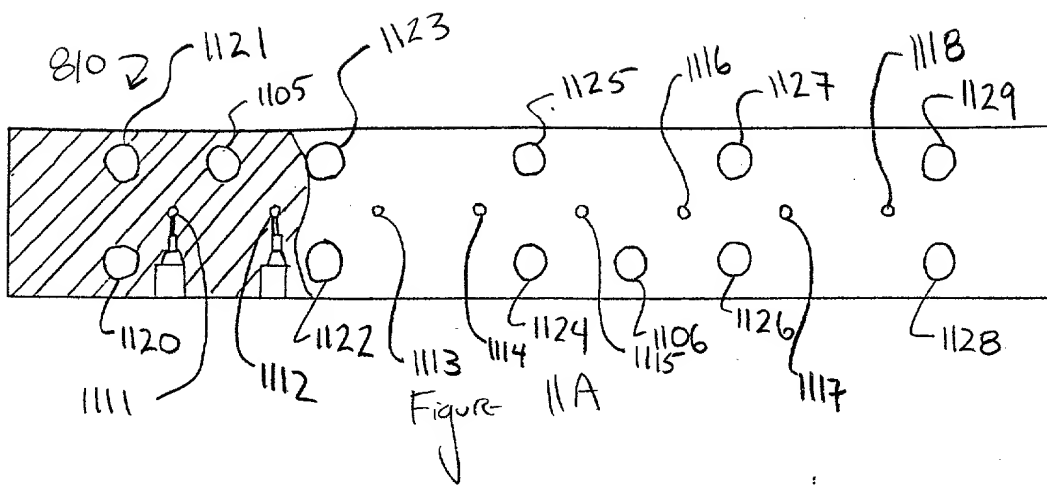
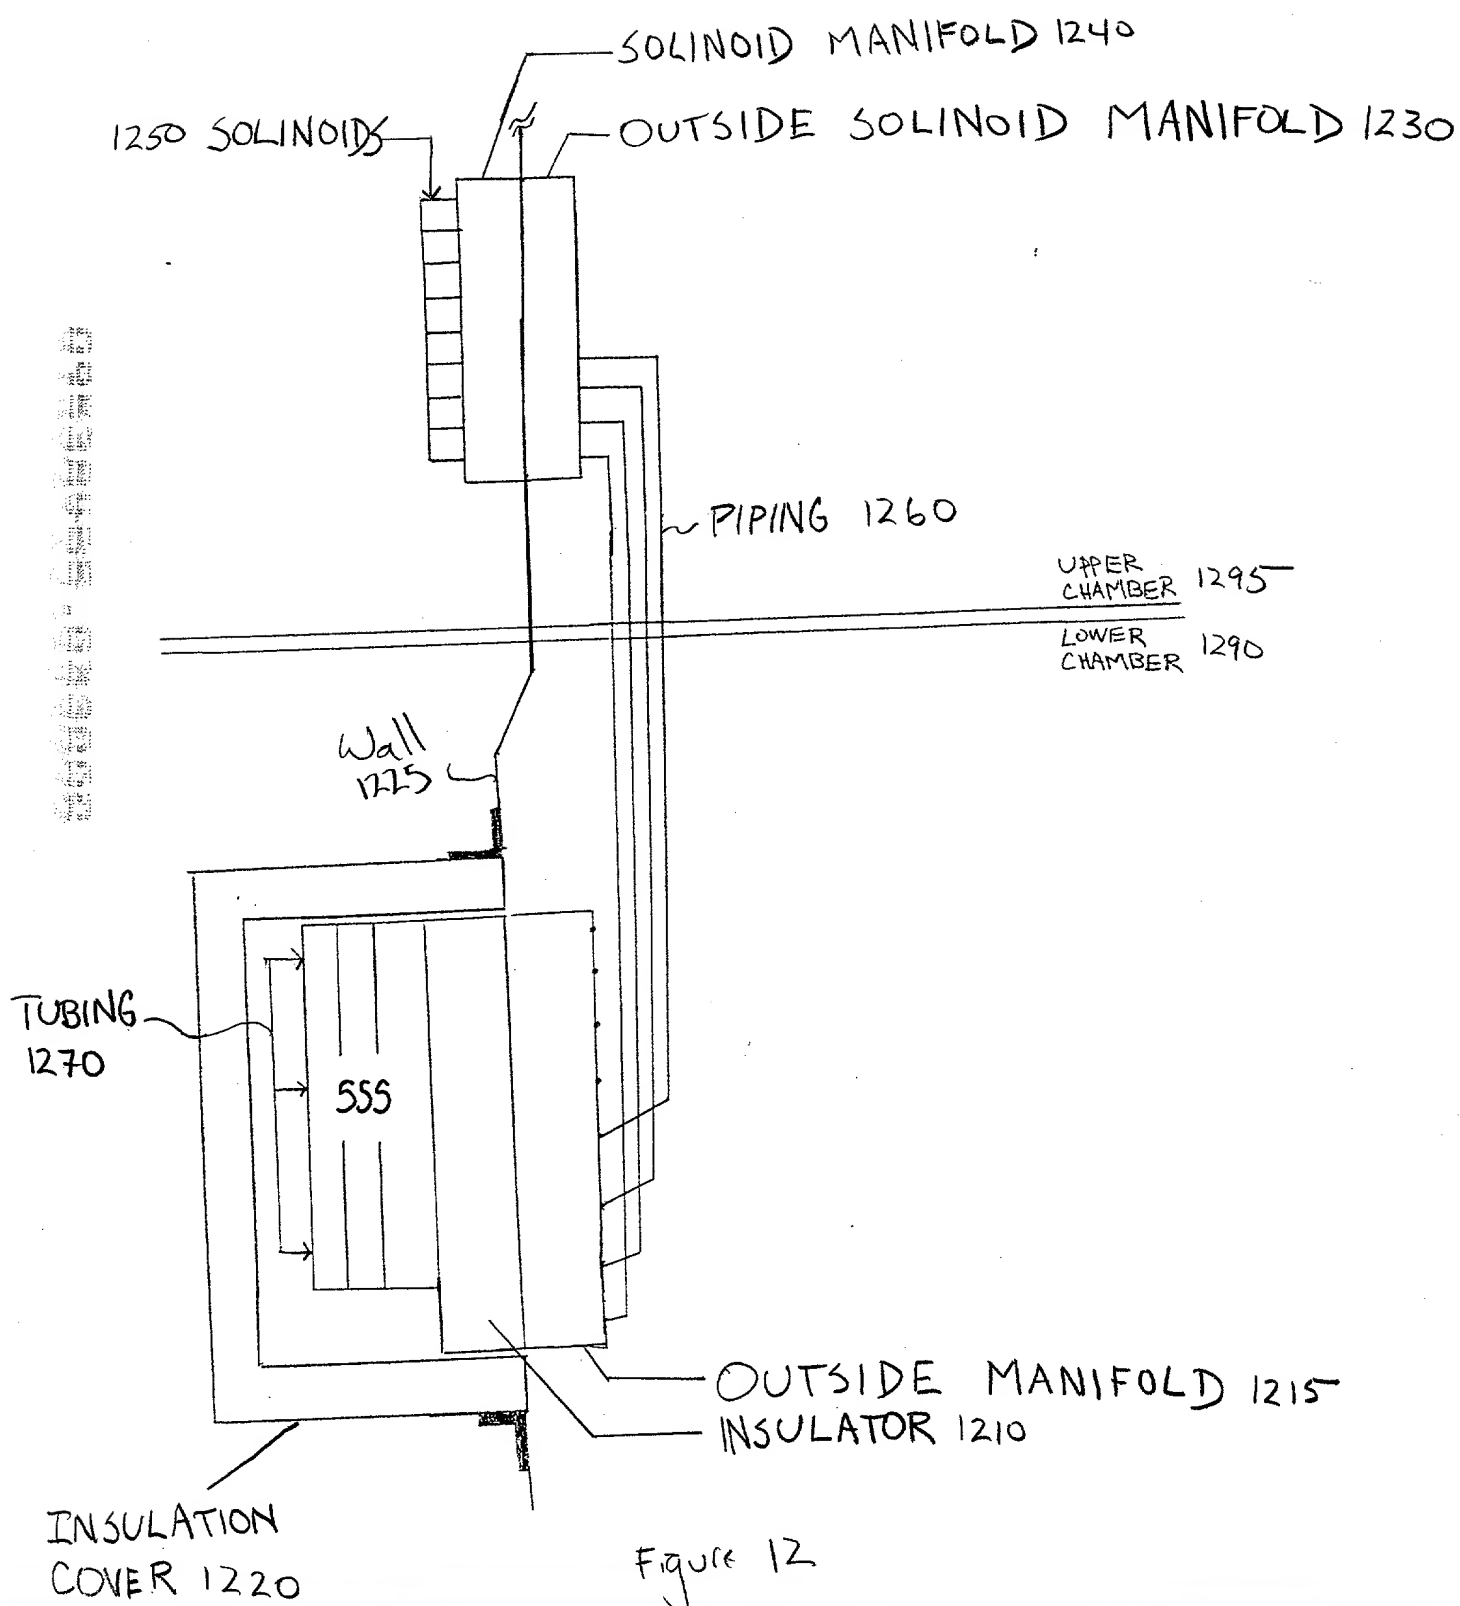


Figure 11B



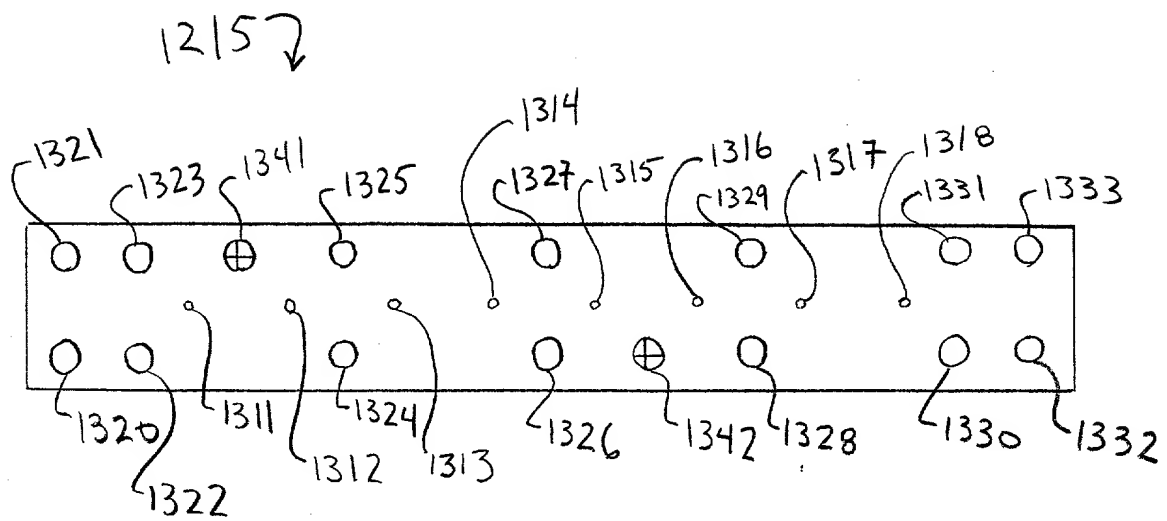


Figure 13



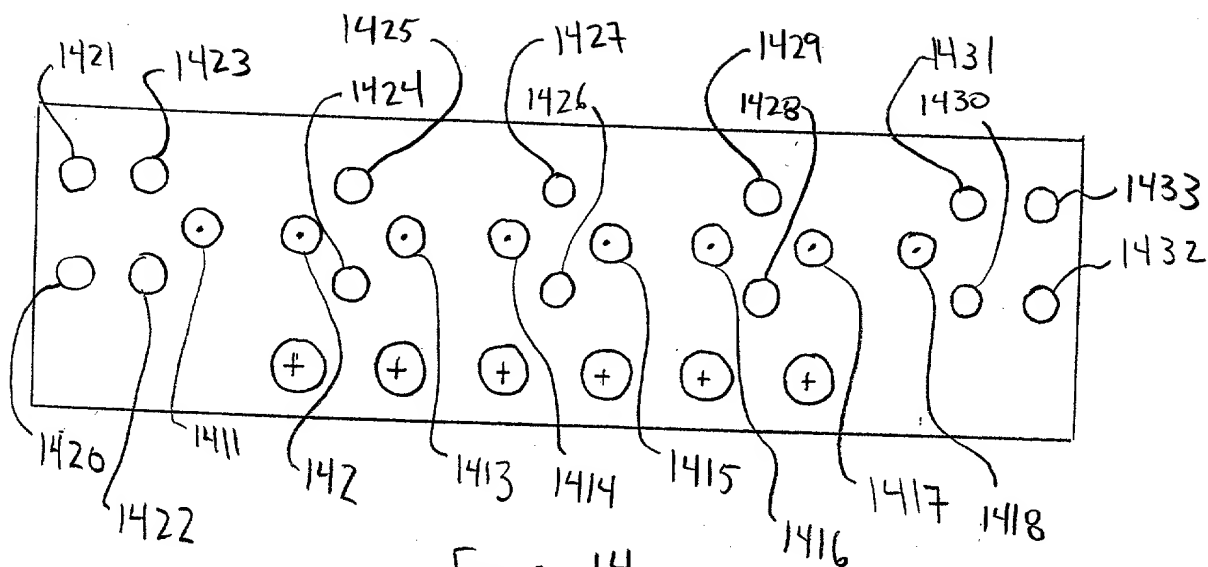


Figure 14



Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)</b>  <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing      OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	<b>Attorney Docket Number</b>	1787-06001
	<b>First Named Inventor</b>	YANG XU
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	/
	<b>Filing Date</b>	Herewith
	<b>Group Art Unit</b>	
	<b>Examiner Name</b>	

**As a below named inventor, I hereby declare that:**

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**IMPROVED STREAM SWITCHING SYSTEM**

the specification of which  
☒ is attached hereto  
OR  
☐ was filed on (MM/DD/YYYY) [ ] as United States Application Number or PCT International Application Number [ ] and was amended on (MM/DD/YYYY) [ ] (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)
60/141,357	06/28/99

☐ Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number 
 OR  
☒ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number
Michael F. Heim	32,702	Gregory L. Maag	32,363
Robert Gray	41,798	Marcella D. Watkins	36,962
Daniel J. Krueger	42,771	David A. Rose	26,223
		Jonathan M. Harris	44,144

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☐ Customer Number  OR ☒ Correspondence address below

Name	Robert Gray				
Address	Conley, Rose & Tayon, P.C.				
Address	PO Box 3267				
City	Houston	State	TX	ZIP	77253-3267
Country	USA	Telephone	713-238-8000	Fax	712/238-8008

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])			Family Name or Surname		
YANG			XU		
Inventor's Signature	<i>Chang Xu</i>			Date	3/27/00
Residence: City	Houston	State	TX	Country	USA
				Citizenship	P.R. China
Post Office Address	9715 Green Valley Ln.				
Post Office Address	Same				
City	Houston	State	TX	ZIP	77064
				Country	USA

☒ Additional inventors are being named on the ☒ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +

PTO/SB/02A (3-97)

Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION

## ADDITIONAL INVENTOR(S) Supplemental Sheet

Page 1 of 1

<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
TERESA				LECHNER-FISH			
Inventor's Signature		<i>Teresa Lechner-Fish</i>			3/27/00		Date
Residence: City		Houston		State	TX	Country	USA
Post Office Address		22410 Cove Hollow Dr					
Post Office Address							
City		Katy		State	TX	ZIP	77450
				Country	USA		
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature					Date		
Residence: City				State		Country	
Post Office Address							
Post Office Address							
City				State		ZIP	
				Country			
<b>Name of Additional Joint Inventor, if any:</b>				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature					Date		
Residence: City				State		Country	
Post Office Address							
Post Office Address							
City				State		ZIP	
				Country			

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.